

Figure 2

200


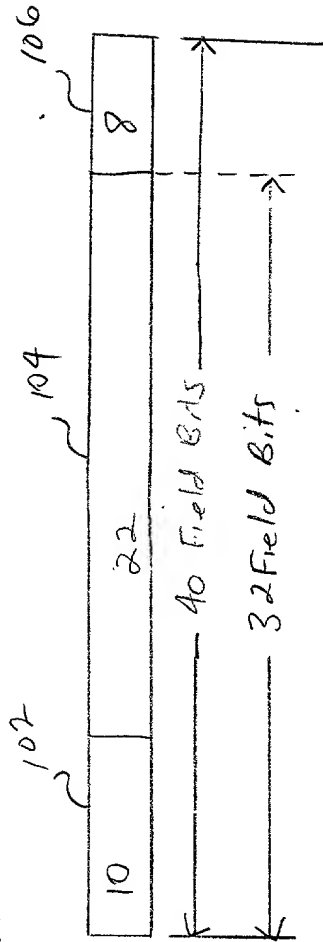


Figure 1

100

Figure 3.

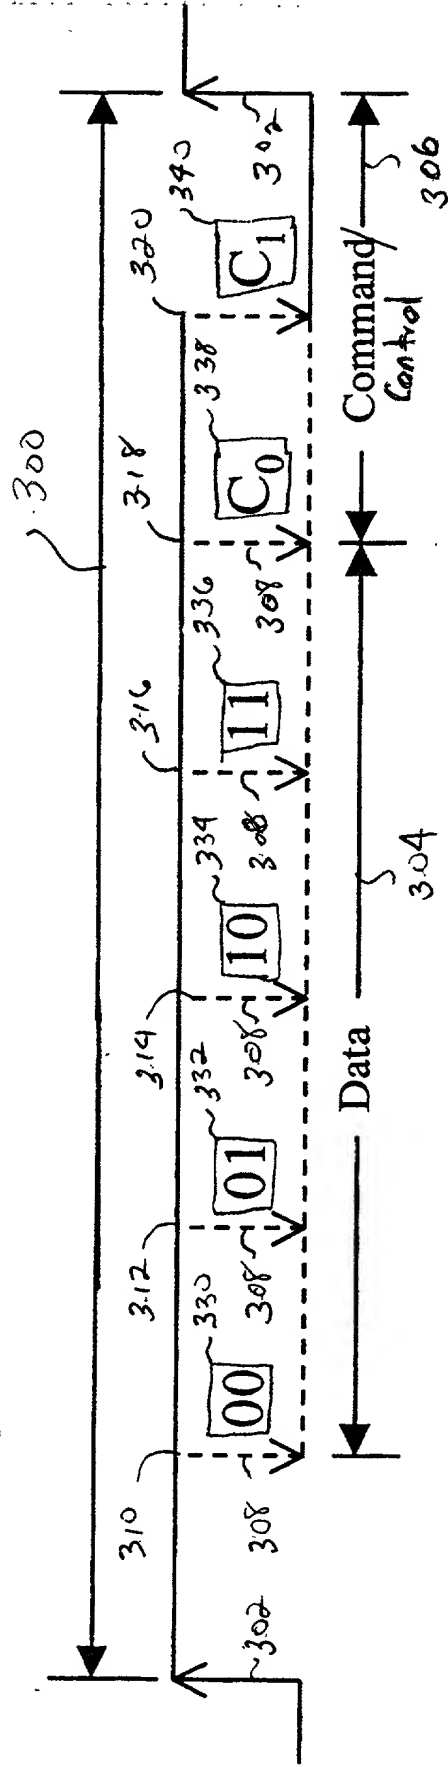

~702

transmit frames comprising a data structure, command structure, and clock structure to a receiving device



receive the frames at the receiving device and use the clock structure to synchronize (adjust the phase of) ~~one or more computers~~ of the frames

~704

700

Figure 7

09885344.061901
T06T90.46E8860